

DRACO BS730 FLUORESCENT



12" - 16"



Suspended Luminaire

Application: The DRACO® BS730 compact fluorescent low-bay luminaire offers a perfect blend of efficiency, performance and design. The decorative, yet durable extruded aluminum ballast housing can be suspension cable or pendant mounted. Depending on lamp type, 12" or 16" refractors can be applied. Several refractor types are available. The DRACO® BS730CF is ideal for applications such as low-bay warehouses, schools, libraries, open ceiling areas and enclosed walkways.

Type: _____

Project: _____

CONFIGURE:

a	MODEL	b	LAMPS	c	REFRACTOR	d	MOUNTING	e	INPUT	f	OPTIONS	
BS730CF		126W	1x26W CF	142W	1x42W CF	12ACT	12" acrylic clear translucent	AC50	cable 50"	120V	CCH	custom color housing
		226W	2x26W CF	242W	2x42W CF	12ART	12" acrylic red translucent	AC72	cable 72"	277V	SPCW	spiral cord white
		326W	3x26W CF	342W	3x42W CF	12ABT	12" acrylic blue translucent	AC100	cable 100"	120/277V	SPCB	spiral cord black
		426W	4x26W CF	442W	4x42W CF	12AGT	12" acrylic green translucent	AC150	cable 150"	347V	CR	custom refractor
						12AAT	12" acrylic amber translucent	AC250	cable 250"		EM	650 lumens
		132W	1x32W CF			12AL	12" aluminum	PK12	pendant 12"		SL12	12" safety lens
		232W	2x32W CF			16ACT	16" acrylic clear translucent	PK18	pendant 18"		SL16	16" safety lens
		332W	3x32W CF			16AL	16" aluminum	PK24	pendant 24"			
		432W	4x32W CF					PK36	pendant 36"			
								PKCL	custom pendant			
												NOTE (1): EM will operate one lamp.
												NOTE (2): For custom color specify color code or sample.
MODEL	a	LAMPS	b	REFRACTOR	c	MOUNTING	d	INPUT	e	OPTIONS	f	
BS730CF												

HOUSING: Extruded aluminum construction with powder coated silver metallic as standard. Custom finishes including painting and anodizing.



REFRACTOR: 12" acrylic translucent prismatic design available in clear (ACT), red (ART), blue (ABT), green (AGT), and amber (AAT). Also available in spun aluminum (AL). 16" acrylic translucent prismatic design available in clear (ACT). Also available in spun aluminum (AL).

LAMP/SOCKET: (1-4) 26W, 32W, or 42W GX24q series base CF lamp. (lamp(s) not included).

MOUNTING: AC50 50" aviation cable, adjustable. AC72 72" aviation cable, adjustable. AC100 100" aviation cable, adjustable. AC150 150" aviation cable, adjustable. AC250 250" aviation cable, adjustable. Aviation cable mount uses 1/4" deep, 5" diameter white canopy. Pendant luminaires to have flat, 5" diameter white canopy. Canopies mount to standard 4" octagonal junction box supplied by others.

PK12 12" pendant 3/8" IPS, **PK18** 18" pendant 3/8" IPS, **PK24** 24" pendant 3/8" IPS, **PK36** 36" pendant 3/8" IPS, **PKCL** custom pendant length, diameter and finish. **SVL** swivel pendant connector has 45° rotation and 75lbs maximum load.

POWER LINE/FEED: 18/4 SJT straight white cord, 60" long, cord may be field cut. Power line / feed attached to housing for all mounting types.

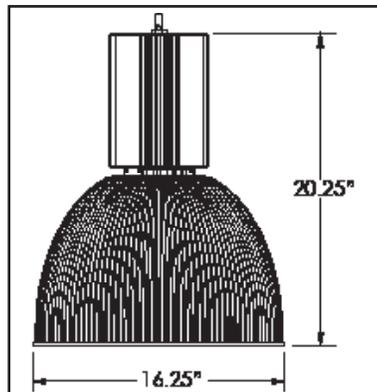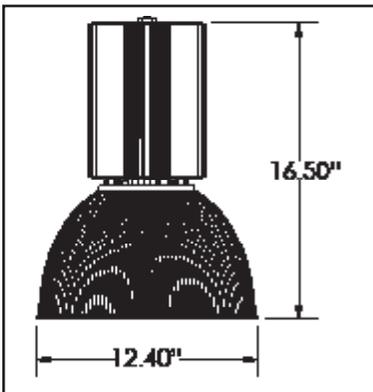

DRACO

BS730

METAL HALIDE



12" - 16"



Suspended Luminaire

Application: The DRACO® BS730 metal halide lowbay luminaire offers a perfect blend of efficiency, performance and design. The decorative, yet durable extruded aluminum ballast housing can be suspension cable or pendant mounted. Depending on lamp type, 12" or 16" refractors can be applied. Several refractor types are available. The DRACO® BS730MH is ideal for applications such as low bay warehouses, schools, libraries, open ceiling areas and enclosed walkways.

Type: _____

Project: _____

CONFIGURE:

a	b	c	d	e	f
MODEL	LAMP	REFRACTOR	MOUNTING	INPUT	OPTIONS
BS730MH	50W 50W MH 70W 70W MH 100W 100W MH 150W 150W MH 175W 175W MH 250W 250W MH <small>NOTE: 175W, 250W require 16" refractor</small>	12ACT 12" acrylic clear translucent 12ART 12" acrylic red translucent 12ABT 12" acrylic blue translucent 12AGT 12" acrylic green translucent 12AAT 12" acrylic amber translucent 12AL 12" aluminum 16ACT 16" acrylic clear translucent 16AL 16" aluminum	AC50 cable 50" AC72 cable 72" AC100 cable 100" AC150 cable 150" AC250 cable 250" PK12 pendant 12" PK18 pendant 18" PK24 pendant 24" PK36 pendant 36" PKCL custom pendant <small>NOTE (1): SVL for swivel pendant NOTE (2): AC is fully adjustable</small>	120V 208V 240V 277V 347V 408V	CCH custom color housing SPCW spiral cord white SPCB spiral cord black CR custom refractor SL12 12" safety lens SL16 16" safety lens QRS quartz restrrike QRSTD quartz restrrike with time delay <small>NOTE: For custom color specify color code or sample</small>
MODEL a	LAMP b	REFRACTOR c	MOUNTING d	INPUT e	OPTIONS f
BS730MH					

HOUSING: Extruded aluminum construction with powder coated silver metallic as standard. Custom finishes including painting and anodizing are available.



REFRACTOR: 12" acrylic translucent prismatic design available in clear (ACT), red (ART), blue (ABT), green (AGT), and amber (AAT). Also available in spun aluminum (AL). 16" acrylic translucent prismatic design available in clear (ACT). Also available in spun aluminum (AL).

LAMP/SOCKET: One (1) 50W, 70W, 100W, 150W, 175W or 250W medium/mogul base for metal halide lamp (lamp is not included).

MOUNTING: AC50 50" aviation cable, adjustable. AC72 72" aviation cable, adjustable. AC100 100" aviation cable, adjustable. AC150 150" aviation cable, adjustable. AC250 250" aviation cable, adjustable. Aviation cable mount uses 1/4" deep, 5" diameter white canopy. Pendant luminaires to have flat, 5" diameter white canopy. Canopies mount to

standard 4" octagonal junction box supplied by others. PK12 12" pendant 3/8" IPS, PK18 18" pendant 3/8" IPS, PK24 24" pendant 3/8" IPS, PK36 36" pendant 3/8" IPS, PKCL custom pendant length, diameter and finish. SVL swivel pendant connector has 45° rotation and 75lbs maximum load.

POWER LINE/FEED: 18/4 SJT straight white cord, 60" long, cord may be field cut. Power line / feed attached to housing for all mounting types.

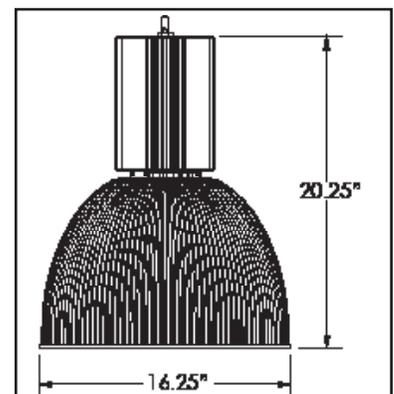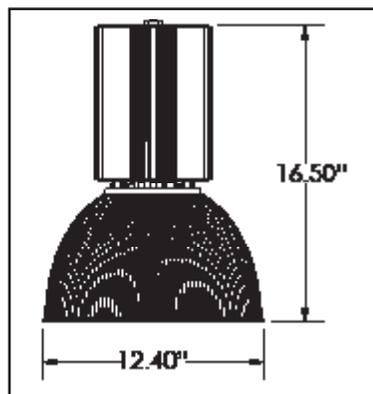

DRACO BS730

LIGHT EMITTING DIODE



12" - 16"



Suspended Luminaire

Application: The DRACO® BS730 LED lowbay luminaire has combined performance and efficiency. The four piece integrated extruded aluminum housing is designed for suspension cable or rigid pendant mounting. 12" or 16" refractors are used. Several refractor types are available. The DRACO® BS730 LED is ideal for retail, open ceiling areas, loft style offices and cafes.

Type: _____

Project: _____

CONFIGURE:

a	MODEL	b	LENS ANGLE	c	LENS	d	REFRACTOR	e	MOUNTING	f	INPUT	g	OPTIONS
	BS730LED		WT32 3200K WT45 4500K WT65 6500K RGB color mixing SCL single color LED <small>NOTE: single color LED available</small>		NBD narrow distribution MBD medium distribution NOL no optical lens <small>NOTE: NOL has no secondary lens; for wide/open distribution</small>		12ACT 12" acrylic clear 12ART 12" acrylic red 12ABT 12" acrylic blue 12AGT 12" acrylic green 12AAT 12" acrylic amber 12AL 12" aluminum 16ACT 16" acrylic clear 16AL 16" aluminum		AC50 cable 50" AC72 cable 72" AC100 cable 100" AC150 cable 150" AC250 cable 250" PK12 pendant 12" PK18 pendant 18" PK24 pendant 24" PK36 pendant 36" PKCL custom pendant <small>NOTE (1): SVL for swivel pendant</small> <small>NOTE (2): AC is fully adjustable</small>		120/277V <small>NOTE: Consult factory for 347V</small>		CCH custom color housing SPCW spiral cord white SPCB spiral cord black SL12 12" safety lens SL16 16" safety lens
	MODEL a		LED / PERFORMANCE b		LENS c		REFRACTOR d		MOUNTING e		INPUT f		OPTIONS g
	BS730LED												

HOUSING: Extruded aluminum construction with gray RAL 7040 powder coated finish as standard. Custom finishes are also available including different powder coated colors and anodizing.

REFRACTOR: 12" acrylic translucent prismatic design available in clear (ACT), red (ART), blue (ABT), green (AGT) and amber (AAT). The 16" acrylic translucent prismatic design is available in clear (ACT) and Aluminum with a gray powder coated finish (AL).

LED MODULE: Beghelli technology LED module. Standard 3200K, 4500K or 6500K versions. Custom color temperatures and performance available upon request. RGB color mixing available. Single color LED offered in red, red/orange, amber, green, cyan, blue or royal blue.

CONTROL: DRACO® RGB units are compatible with DMX-512 protocol / color controller.

MOUNTING: AC50 50" aviation cable, adjustable. AC72 72" aviation cable, adjustable. AC100 100" aviation cable, adjustable. AC150 150" aviation cable, adjustable. AC250 250" aviation cable, adjustable.

Pendant luminaire and Aviation cable mount uses 1/4" deep, 5" diameter white canopy. Canopies mount to standard 4" octagonal junction box supplied by others. PK12 12" pendant 3/8" IPS, PK18 18" pendant 3/8" IPS, PK24 24" pendant 3/8" IPS, PK36 36" pendant 3/8" IPS, PKCL custom pendant length, diameter and finish. SVL swivel pendant connector has 45° rotation and 75lbs maximum load.

POWER LINE/FEED: DRACO® is supplied with 36"-18AWG - 3 conductor SJT power cord. RGB LED fixture uses a 36" long 4 wire cord. Power line/feed attached to housing for all mounting types. Power cord may be field cut.

POWER SUPPLY: Internal per unit

WATTAGE: 24W per fixture

NOTE: Power consumption may vary based on LED specifications. Please consult factory for proper power supply configuration.

