

PHOTOMETRIC DATA:

Configuration: **AVRT5HO-HT-354W-120/277V-MF-WT-FP**

Initial Lamp Lumens: 4450

Luminaire Efficiency: 40.1%


CANDLE POWER SUMMARY

ANGLE	ALONG	22.5	45	67.5	ACROSS	OUTPUT LUMENS
0	691	691	691	691	691	
5	693	687	694	701	694	68
15	665	669	718	786	802	206
35	516	656	1108	1443	1490	647
45	414	707	1107	1029	877	642
55	250	494	253	95	40	242
65	40	51	11	7	6	31
75	40	51	11	7	6	31
75	3	0	0	1	0	1
85	0	0	0	0	0	0
90	0	0	0	0	0	0
95	37	30	33	41	38	46
105	213	203	173	185	206	206
115	398	414	361	375	414	382
125	567	589	536	552	592	503
135	714	737	703	714	745	554
145	836	860	869	859	856	535
155	954	981	1017	989	980	455
165	1117	1134	1148	1132	1146	320
175	1256	1260	1272	1268	1271	121
180	1282	1282	1282	1282	1282	

ZONE	LUMENS	% LAMP	% LUMINAIRE
0-30	664	4.98	12.43
0-40	1311	9.83	24.52
0-60	2195	16.44	41.04
0-90	2228	16.69	41.65
40-90	916	6.86	17.13
60-90	32	.25	.61
90-180	3121	23.38	58.35
0-180	5349	40.07	100.00

LUMINANCE SUMMARY

Angle°	ALONG	45	ACROSS
45°	7508	20142	15956
55°	5577	5684	888
65°	1221	321	176
75°	130	0	0
85°	0	0	0

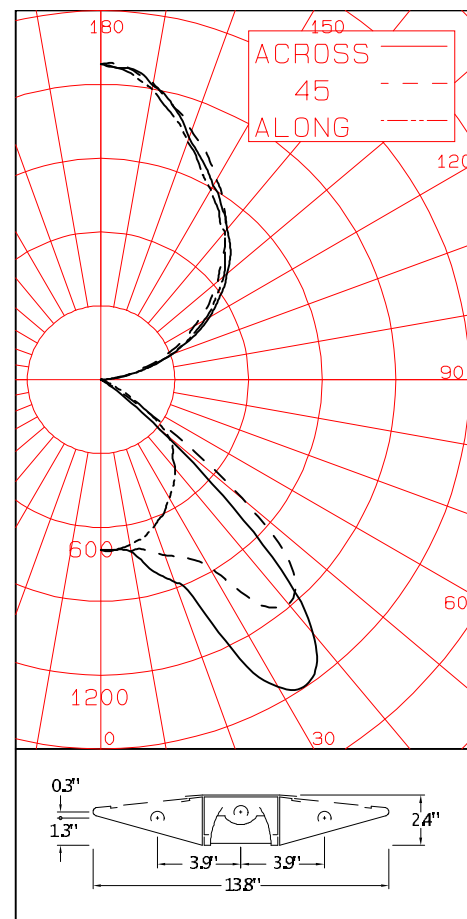

Please visit www.beghelliluce.com to download additional photometry pdfs and IES files.