

GIRA SOLE SPOT

GSSLED

LIGHT EMITTING DIODE

SP US
187981

LED - Spot

IP65



Architectural Luminaire

Application: The GIRA SOLE SPOT (^{GS}Spot) series is a surface mount landscape luminaire. Advancing interior and exterior architectural and landscape lighting to new levels of efficiency, reliability and performance by utilizing the Beghelli LUCE LED light engine. Up to five times more efficient than conventional lamps and capable of retaining up to 70% of its initial light output with an estimated life of 50,000 hours. ^{GS}SPOT is available with white, RGB color mixing or custom color LED light engines. The ^{GS}SPOT housing is fabricated from high-strength aluminum alloy with an anodized or hard anodized finish. Ideal for use in landscape applications, walkways, corridors, galleries and retail.

Type: _____

Project: _____

CONFIGURE:

a	b	c	d	e	f
MODEL	LED / PERFORMANCE	LENS ANGLE	INPUT	MOUNTING	FINISH
GSSLED GIRA SOLE SPOT GSSLED SERIES	WT32 3200K WT45 4500K WT65 6500K RGB color mixing SCL single color LED NOTE: single color LED available, consult factory.	NBD narrow distribution MBD medium distribution	120V 277V 120/277V NOTE: consult factory for 347V	CM5 5" canopy SM18 18" stake	AB anodized black AC anodized clear HAB hard ano. black HAT hard ano. titanium CAC custom hard anodized color NOTE: custom colors must be specified
MODEL a	LED / PERFORMANCE b	LENS ANGLE c	INPUT d	MOUNTING e	FINISH f
GSSLED					

HOUSING: ^{GS}SPOT is constructed from machined aluminum alloy with anodized or hard anodized finish.

OPTICAL LENS: Hexagonal design for tight pack uniformity of LED cluster. Optical grade poly carbonate material provides thermal stability and overall system durability.

DIFFUSER: Fully gasketed, tempered glass, recessed lens. Complete light emission clear optics for increased efficiency and performance.

LED LIGHT ENGINE: High performance white LED available in standard color temperatures 3200K (warm), 4500K (daylight), 6500K (cool). Custom color temperatures available upon request. RGB color mixing available. Single color LED offered in red, red/orange, amber, green, cyan, blue or royal blue.

CONTROL: ^{GS}SPOT RGB units are compatible with DMX-512 protocol / color controller.

MOUNTING: (**SM18**) 18" long stake mounting or (**CM5**) 5" diameter canopy mounting are



available. Color matched 18" stake or 5" canopy are standard.

POWER LINE/FEED: Single color LED fixture uses a 36" long black two wire cord, and RGB LED fixture uses a 36" long 4 wire cord. Cord may be field cut.

WATTAGE: 8.5W per fixture, single color.

POWER SUPPLY: Remote (external) power supplies are available in 25W, 40W, 60W and 96W. RGB 320W (4/80W outputs) power supply/decoder.

NOTE: Power consumption may vary based on LED specifications. Please consult factory for proper power supply configuration.

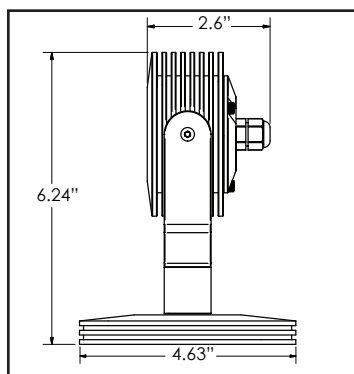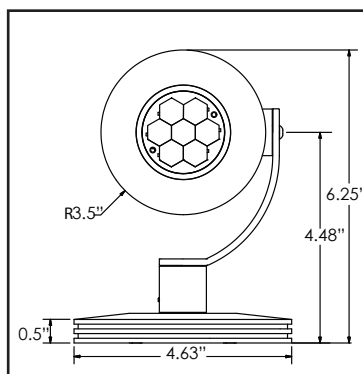

GIRA SOLE SPOT