

PHOTOMETRIC DATA:

Configuration:	BS500T5HO-HT-254W-120/277V-RE-MF
Initial Lamp Lumens:	4450
Luminaire Efficiency:	72.3%


CANDLE POWER SUMMARY

ANGLE	ALONG	22.5	45	67.5	ACROSS	OUTPUT LUMENS
0	3332	3332	3332	3332	3332	
5	3343	3339	3345	3327	3314	323
10	3294	3287	3328	3347	3352	323
15	3202	3204	3316	3422	3411	933
20	3060	3077	3281	3379	3379	933
25	2899	2968	3169	3165	3103	1417
30	2715	2807	2961	3020	3109	1417
35	2507	2620	2746	2992	2995	1724
40	2255	2376	2611	2632	2652	1724
45	1956	2106	2197	2068	1937	1527
50	1518	1610	1431	826	482	1527
55	734	857	541	165	59	491
60	151	277	93	13	0	491
65	0	5	0	2	0	22
70	0	0	0	0	0	22
75	0	0	0	0	0	0
80	0	0	0	0	0	0
85	0	0	0	0	0	0
90	0	0	0	0	0	0

ZONE	LUMENS	% LAMP	% LUMINAIRE
0-30	2672	30.02	41.52
0-40	4396	49.39	68.31
0-60	6413	72.06	99.65
0-90	6435	72.31	100.00
40-90	2039	22.92	31.69
60-90	22	.25	.35
90-180	0	.00	.00
0-180	6435	72.31	100.00

LUMINANCE SUMMARY

Angle°	ALONG	45	ACROSS
45°	13918	15697	13837
55°	6439	4764	518
65°	0	0	0
75°	0	0	0
85°	0	0	0

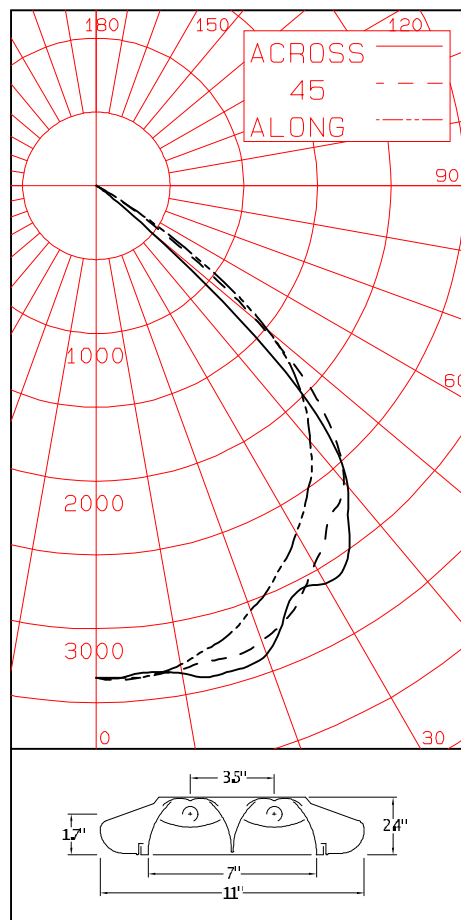

Please visit www.beghelliLUCe.com to download additional photometry pdfs and IES files.